


## FLIGHT TRIGGER FOR SULZER P.U MODEL PLASTIC BODY

**4mm  
SHIELDED**

### OPERATIONAL DATA:

- |   |                       |
|---|-----------------------|
| 1. MOUNTING IN PLASTIC  | SCREW & NUT FITTED.   |
| 2. SWITCHING DISTANCE<br>WITH Fe-ST37 PLATE<br>SIZE 12mm X 12mm X 1mm | 4mm                   |
| 3. HYSTERESIS   | 3% TO 15%             |
| 4. REPEATABILITY  | 0.01mm                |
| 5. TEMPERATURE DRIFT  | <10%                  |
| 6. AMB. TEMP. RANGE   | 0 DEG.C. TO 70 DEG.C. |

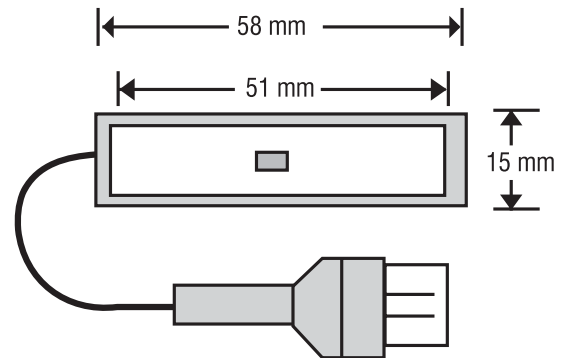

### ELECTRICAL DATA:

- |                               |  |
|-------------------------------|--|
| 7. OPERATING VOLTAGE<br>RANGE | 15V DC ; $R_L = 300 \text{ OHM}$   |
| 8. RIPPLE                     | <10%   |
| 9. CURRENT CONSUMPTION        | <=1mA..... ..ACTIVE FACE DAMPED<br>>=4mA..... ..ACTIVE FACE UNDAMPED<br>10mA..... .. MAXIMUM |

### OUR PART NO.

### Eqv. to MODLE NAME


PSISP7FLTRI SULZER ZSD/SSD/VSD & TW11(#)

### MECHANICAL DATA:

- |                      |  |
|----------------------|--|
| 10. HOUSING/MOUNTING | PLASTIC BODY                                     |
| 11. TERMINATION      | BY Cu CABLE PVS INSULATED<br>WITH TWO PIN SOCKET |

### CONNECTION DETAILS:

- |       |                          |
|-------|--------------------------|
| RED   | POLARITY INTERCHANGEABLE |
| BLACK |                          |

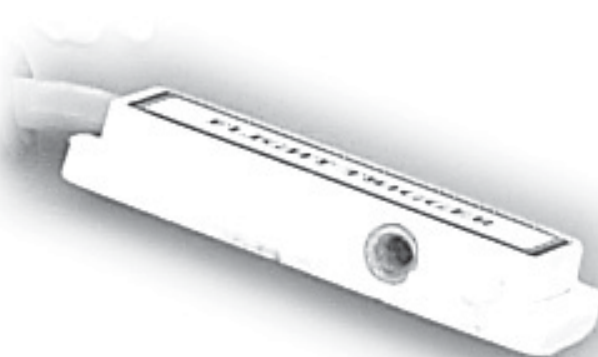

# Recommended for the application subject to manufacturer's change time to time.

\*\*Please contact factory for different barrel lengths.

Specifications are subject to change without notice.